




LED Downlight CW / NW / WW

MODEL NO. MS-SP0600A-CW-(CH/NI/GO/OW/WH) // MS-SP0600A-NW-(CH/NI/GO/OW/WH)
MS-SP0600A-WW-(CH/NI/GO/OW/WH)

Specifications

Power consumption : 3.8W
Input voltage : 100 ~ 240VAC
LED operating life : 30,000 hours
of LEDs : 3ea × 1W
Colors : Cool-White(3800 ~ 5600K), Warm-White(2500 ~ 3800K),
Natural-White(5600 ~ 10000K)
Operating temperature : -20°C ~ 45°C
Beam angle : 58°
Weight : 165g
Color Rendering Index rating : 80
Luminous flux : 130 lm


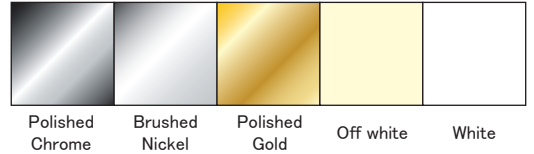


LED Downlight CW / NW / WW

MODEL NO. MS-SP0320A-CW-(CH/NI/GO/OW/WH) // MS-SP0320A-NW-(CH/NI/GO/OW/WH)
MS-SP0320A-WW-(CH/NI/GO/OW/WH)

Specifications

Power consumption : 9.3W
Input voltage : 100 ~ 240VAC
LED operating life : 30,000 hours
of LEDs : 6ea
Colors : Cool-White(3800 ~ 5600K), Warm-White(2500 ~ 3800K),
Natural-White(5600 ~ 10000K)
Operating temperature : -20°C ~ 45°C
Beam angle : 45°
Weight : 550g
Color Rendering Index rating : 80
Luminous flux : 390lm
Ceiling opening : 115mm

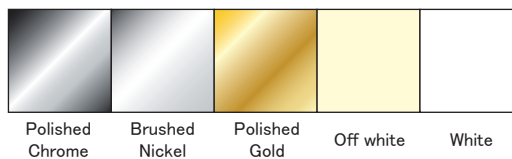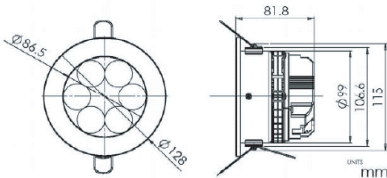

LED Downlight DW / WW

MODEL NO. MS-SP0901-DW-(FG/WP) // MS-SP0901-WW-(FG/WP)

Specifications

Power consumption : 24W
Input voltage : 12 ~ 30VDC
of LEDs : 8ea
Colors : Cool-White(3800 ~ 5600K), Warm-White(2500 ~ 3800K),
Natural-White(5600 ~ 10000K)
Operating temperature : -20°C ~ 45°C
Weight : 550g
Color Rendering Index rating : 80
Luminous flux : Warm-White 800 lm / Day-White 1050 lm

