

LED Floodlight CW/WW

MODEL NO. MS-FDP36W145-CW // MS-FDP36W145-WW
MS-FDP36W120-CW // MS-FDP36W120-WW


Specifications

Power consumption: 36W
Input voltage: 12VDC & 24VDC
LED operating life: 50,000 hours
of LEDs: 24ea High power LED
Colors: Cool-White(CW): 6000K, Warm-White(WW): 3000K
Operating temperature: -30°C ~ 50°C
Beam angle: 145 × 73° , 120°
Weight: 1.56kg
Water class: IP65



| Model No. | Power Consumption | Color Temperature | Beam Angle | Luminous flux |
|--------------|-------------------|-------------------|------------|---------------|
| FDP36W145-CW | 36W | 6000K | 145 × 73° | 2600lm |
| FDP36W120-CW | 36W | 6000K | 120° | 2600lm |
| FDP36W145-WW | 36W | 3000K | 145 × 73° | 1670lm |
| FDP36W120-WW | 36W | 3000K | 120° | 1670lm |



MS-FDP36W145-CW/ MS-FDP36W145-WW

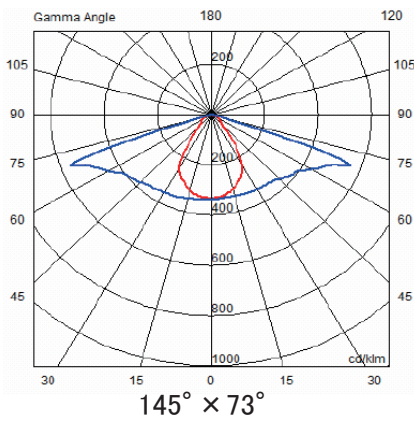

MS-FDP36W145-CW / MS-FDP36W145-WW

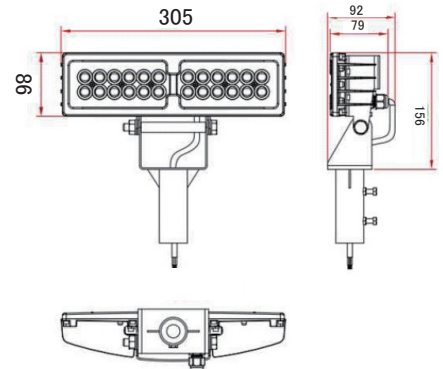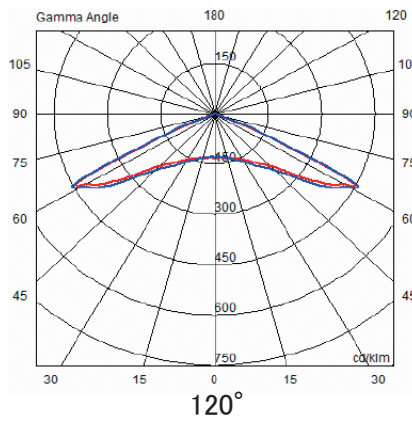

LED Flood light CW/WW

MODEL NO. MS-TL60W-CW // MS-TL60W-WW
MS-TL80W-CW // MS-TL80W-WW
MS-TL100W-CW // MS-TL100W-WW
MS-TL120W-CW // MS-TL120W-WW

Specifications

Power consumption: 60W/80W/100W/120W
Input voltage: 85~265VAC
LED operating life: 50,000 hours
Colors: Cool-White(CW), Warm-White(WW)
Operating temperature: -20°C ~ 50°C
Beam angle: 120-150°
Water class : IP65

| Model No. | Power Consumption | Luminous flux | Weight |
|--------------|-------------------|---------------|---------|
| MS-TL60W-CW | 60W | 4200lm | 7.3 kg |
| MS-TL60W-WW | 60W | 4000lm | 7.3 kg |
| MS-TL80W-CW | 80W | 5600lm | 11.2 kg |
| MS-TL80W-WW | 80W | 5300lm | 11.2 kg |
| MS-TL100W-CW | 100W | 7000lm | 11.2 kg |
| MS-TL100W-WW | 100W | 6500lm | 11.2 kg |
| MS-TL120W-CW | 120W | 8400lm | 11.2 kg |
| MS-TL120W-WW | 120W | 7800lm | 11.2 kg |

