


LED Flood light CW

MODEL NO. MS-TN120W145-DW // TN120W120-DW




Specifications

Power consumption: 120W
 Input voltage: 100Vac ~ 240vac
 LED operating life: 50,000 hours
 # of LEDs: 72ea High power LED
 Colors: Day-White(DW)6000K
 Operating temperature: -30°C ~ 50°C
 Beam angle: 145° x 73° , 120°
 Weight: 8.25kg
 Water class: IP65

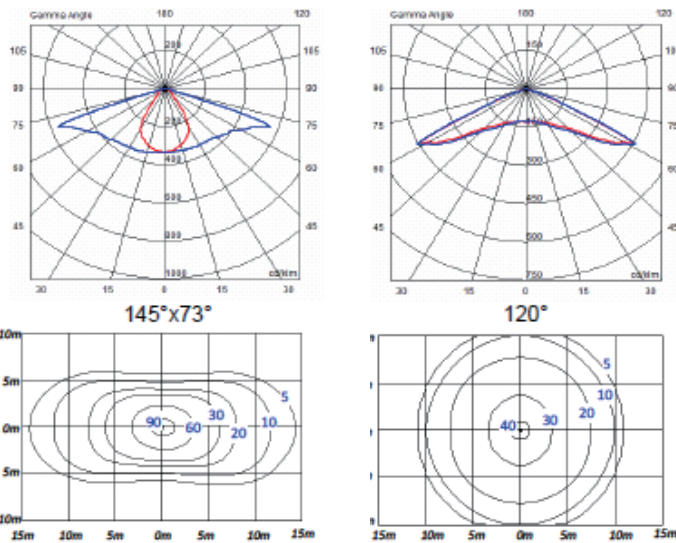

Model No.	Power Consumption	Color Temperature	Beam Angle	Luminous flux
MS-TN120W175-DW	120W	6500K	145° x 73°	7800 lm
MS-TN120W120-DW	120W	6500K	120°	7800 lm

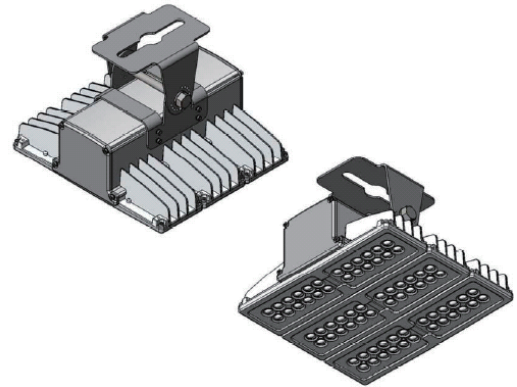

LED Pendant Light CW / WW 30W 50W 60W 70W 80W 100W

MODEL NO. MS-PL30W-CW // MS-PL30W-WW
 MS-PL50W-CW // MS-PL50W-WW
 MS-PL60W-CW // MS-PL60W-WW
 MS-PL70W-CW // MS-PL70W-WW
 MS-PL80W-CW // MS-PL80W-WW
 MS-PL100W-CW // MS-PL100W-WW

Specifications

Power consumption: 30W 50W 60W 70W 80W 100W
 Input voltage: 100 ~ 240VAC
 LED operating life: 50,000hours
 Colors: Cool-White(CW), Warm-White(WW)
 Operating temperature: -20°C ~ 50°C
 Beam angle: 120-150°

Model No.	Color	Luminous Flux	*CRI	Weight
MS-SPL30W-CW	Cool-White(CW)	2,000 lm	75 Ra	3.2Kg
MS-SPL30W-WW	Warm-White(WW)	1,800 lm	75 Ra	3.2Kg
MS-SPL50W-CW	Cool-White(CW)	3,200 lm	75 Ra	3.7Kg
MS-SPL50W-WW	Warm-White(WW)	3,000 lm	75 Ra	3.7Kg
MS-SPL60W-CW	Cool-White(CW)	4,000 lm	75 Ra	3.7Kg
MS-SPL60W-WW	Warm-White(WW)	3,800 lm	75 Ra	3.7Kg
MS-SPL70W-CW	Cool-White(CW)	4,700 lm	75 Ra	3.9Kg
MS-SPL70W-WW	Warm-White(WW)	4,500 lm	75 Ra	3.9Kg
MS-SPL80W-CW	Cool-White(CW)	5,500 lm	75 Ra	5.1Kg
MS-SPL80W-WW	Warm-White(WW)	5,300 lm	75 Ra	5.1Kg
MS-SPL100W-CW	Cool-White(CW)	6,500 lm	75 Ra	5.5Kg
MS-SPL100W-WW	Warm-White(WW)	6,200 lm	75 Ra	5.5Kg

*CRI : Color Rendering Index rating

LED OUTDOOR LIGHT

